Specifications

BATTERY INFO

Capacity:	1002Wh(21.6V,46.4Ah)
Cell Chemistry:	Li-ion NMC
Lifecycles:	⩾500 cycles to 80%
Management System:	BMS, Over Voltage Protection, Short Circuit Protection

RECHARGE TIMES

AC Adapter:	7 Hours
12V Car Adaptor:	14 Hours
Two SolarSaga 100W Solar Panels:	8 Hours

PORTS

AC Output:	110V, 60Hz, 1000W(2000W Surge)
USB-A Output:	5V, 2.4A
Quick Charge 3.0 Output:	5-6.5V, 3A/6.5-9V, 2A/9-12V, 1.5A
USB-C Output:	5V, 3A /9V, 2A / 12V, 1.5A
Car Port:	12V, 10A
DC Input:	12V-30V(200W Max)

GENERAL

Weight:	22.04 lbs(10 kg)
Dimensions(LxWxD):	13.1 x 9.2 x 11.1 in (33.3 x 23.3 x 28.3 cm)
Operating Usage Temperature:	14-104F (-10-40°C)
Certification:	FCC, ROHS, UN38.3, Quick charge3.0
Warranty:	24 Months
Optional Accessory:	Jackery SolarSaga 100W Solar Panel

In The Box

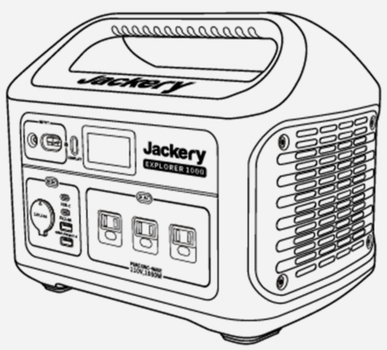

Jackery Explorer 1000



Car Charger Cable



AC & AC Cable (2 Parts)

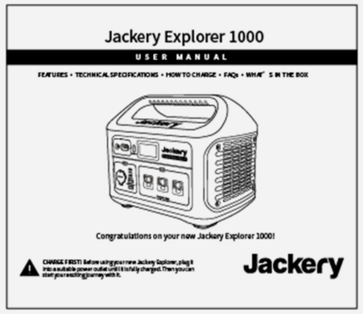

User Manual

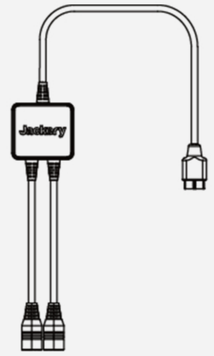

SolarSaga Parallel Adapter Cable